

DEEP CYCLE LONG LIFE BATTERY

Battery Specification

Normal Voltage	12V
Number of cell	6
Design life	10 years

Nominal Capacity 77°F (25°C)

20 hour rate (5.0A, 10.5V) 10	100Ah
hour rate (9.50A, 10.5V)5	95.0Ah
hour rate (217.5A, 10.5V)1	87.5Ah
hour rate (66.2A, 9.6V)	66.2Ah

Internal Resistance

Fully Charged battery 77°F(25°C) ≤5.7mOhms

Self-Discharge

3% of capacity declined per month at 20°C (average)

Operating Temperature Range

Discharge	-20 ~ 60°C
Charge	-10 ~ 60°C
Storage	-20 ~ 60°C

Max. Discharge Current 77°F(25°C)

900(5s)

Short Circuit Current

2100A

Charge Methods:

Constant Voltage Charge
77°F (25°C)

2.40-2.45VPC

Cycle use

Maximum charging current

30.2A

Temperature compensation

-30mV/°C

Standby use

13.6-13.8V


Temperature compensation

-20mV/°C

Dimensions and Weight

Length (mm / inch)	330 / 12.99
Width (mm / inch)	171 / 6.73
Height (mm / inch)	215 / 8.46
Total Height (mm / inch)	220 / 8.66
Approx. Weight(Kg / lbs)	31 / 69.3

*Weight deviation: ± 3%

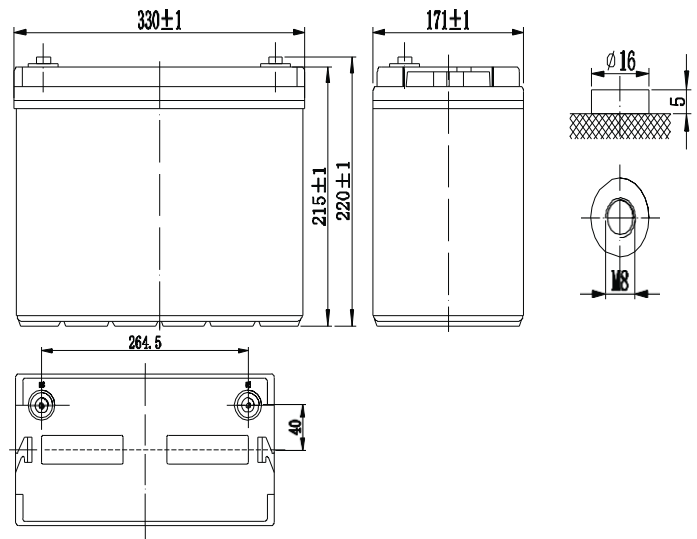

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper / Plug	Fiberglass	Sulfuric acid

Discharge Constant Current (Amperes at 77°F25°C)

End Point	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	220	180	105	65.2	27.6	18.9	9.75	5.20
1.65V	212	173	101	61.6	27.4	18.2	9.70	5.15
1.70V	192	159	93.6	60.6	26.9	17.9	9.65	5.10
1.75V	180	157	90.7	59.6	26.6	17.4	9.60	5.05
1.80V	168	139	88.7	56.5	25.1	17.1	9.50	5.00

Discharge Constant Power (Watts at 77°F25°C)

End Point	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	376	311	194	147	122	69.7	52.3	35.6
1.65V	364	306	183	143	116	66.9	50.7	35.2
1.70V	346	290	178	134	112	65.9	50.4	34.8
1.75V	339	285	173	131	109	63.7	48.6	34.2
1.80V	316	271	167	128	102	61.7	48.0	33.8

(Note) The above characteristics data are average values obtained within threecharge / discharge cycles. All data shall be changed without notice, Starx Security reserves the right to explain and update the information.

General Features

Deep-cycle batteries typically feature thick plates and high-density active material.

The thick battery plates allow more energy storage within the battery plates and releasing during slow discharge.

The high-density active material remains within the batteries' plate/grid structure longer, resisting the normal degradation found in cycling conditions.

Batteries are typically used where the battery is discharged to great extent and then recharged. Deep Cycle refers to applications that typically discharge 60 to 70% or more of the battery capacity.


Superior Deep Cycle Design.

Thick plates and high-density active material.


Longer life in deep cycle applications.

DEEP CYCLE LONG LIFE BATTERY


Discharge Characteristics Curve

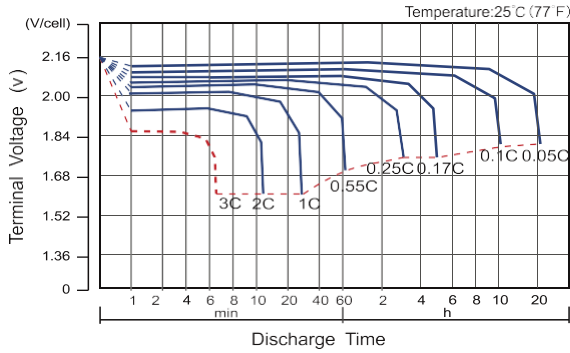


Charge Characteristic Curve For Standby Use

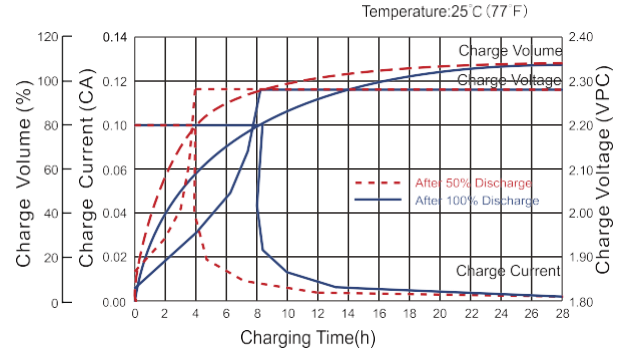


Cycle Life In Relation To Depth Of Discharge

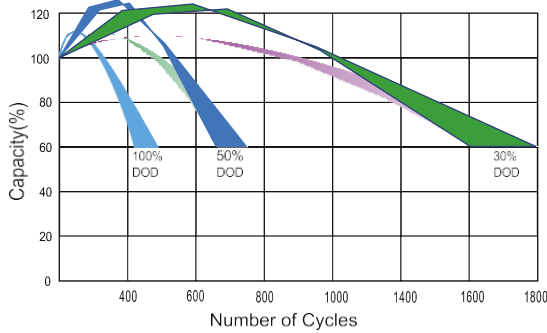


Temperature Effects On Capacity

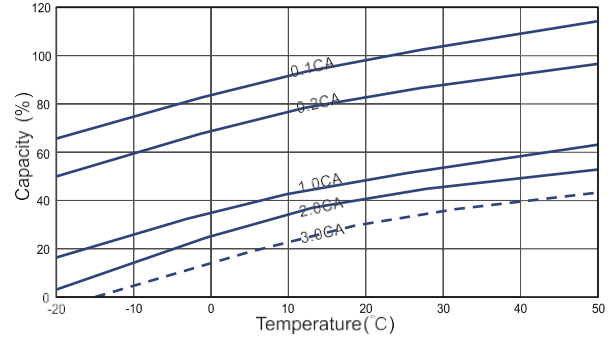


Relationship Between Charging Voltage And Temperature

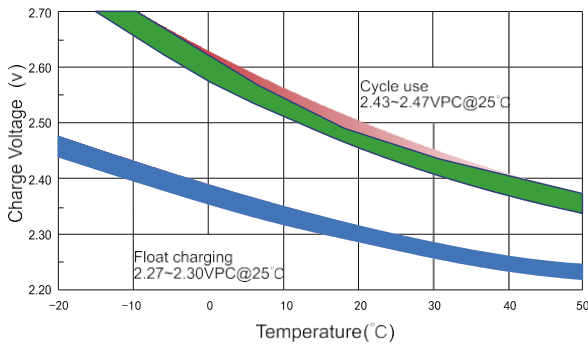

Storage Characteristics

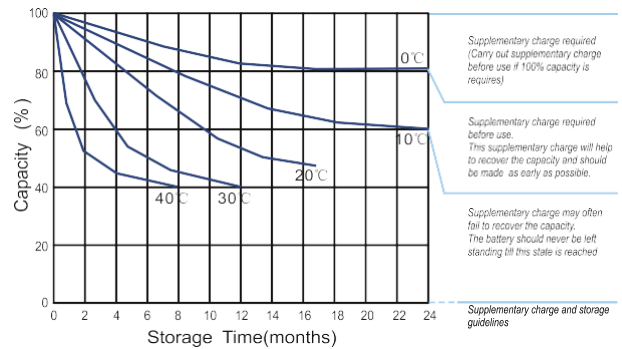

Effect Of Temperature On Long Term Life

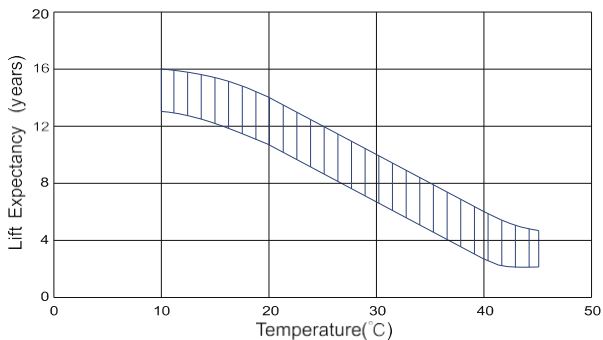

Life Characteristics Of Standby Use

